


**IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.** Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

## INSTALLATION INSTRUCTIONS CAT NO. 1479

**WARNING - RISK OF FIRE:**  
Do not install insulation within three (3) inches of fixtures sides, wiring compartment or top of fixture in such a manner to entrap heat.

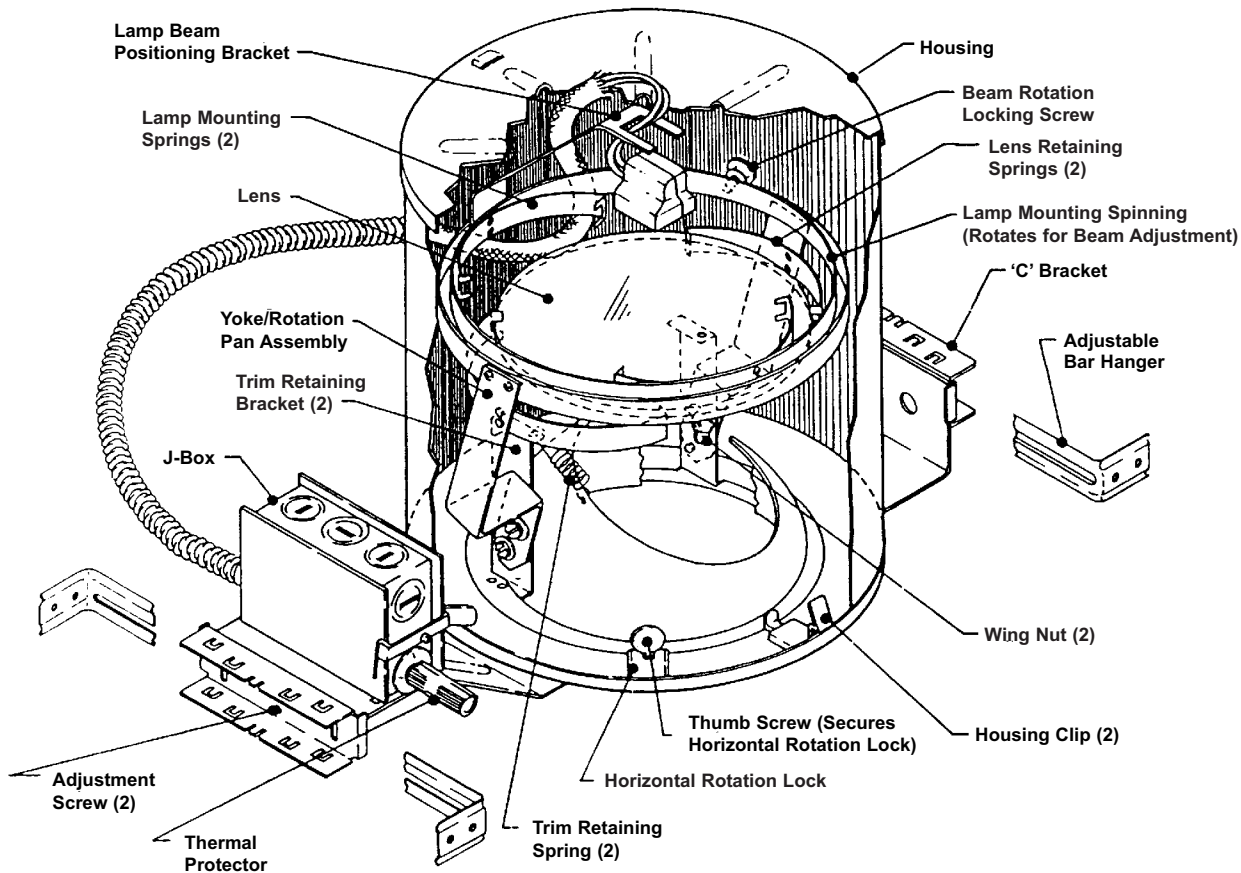

**CAUTION:** To avoid electrical shock, be sure power supply is turned off before installing or servicing this fixture.

1. Refer to instruction sheet No. 463 (included) to assemble the bar hangers, install and adjust the housing.
2. Adjust the fixture so the bottom edge of the plaster flange is flush with the finished ceiling line. Accomplish this using the adjustment screws securing the hanger brackets on either end of the fixture.
3. Remove J-Box cover plate. Remove appropriate knockout and assemble appropriate connector for the supply wire used. Connect ground wires to green ground leads. Connect white (common) to white (leads). Connect power supply (line) to black lead(s). Reinstall J-Box cover.

# Instructions Sheet

**WARNING: DO NOT pinch wires between J-Box/ballast cover and J-Box. Consult a Qualified Electrician for all other options that require other wiring configurations.**

5. Aiming the lamp.
  - A. For horizontal aiming, loosen the thumb screw securing the horizontal rotation lock. Grasp the yoke and rotate (360° max.) about center of fixture until proper aiming is achieved. Tighten the thumb screw to lock the rotation pan in place.
  - B. For vertical aiming, loosen the (2) wing nuts securing the yoke to the trim retaining brackets. Grasp the yoke and push or pull to desired position. Tighten the wing nuts to ensure that desired adjustment is maintained during re-lamping.
  - C. For precise beam adjustment, rotate the lamp mounting spinning until desired beam pattern is achieved. Lock in place by tightening beam rotation locking screw.  
Note: Yoke adjusts from vertical to 45° in one direction only.
6. Install proper lamp, lens and trim.

**CAUTION:** Do not attempt to modify or rewire factory-installed wiring on the fixture. Safety and proper operation of the fixture depend on the integrity of the wiring.

NOT FOR RESIDENTIAL USE  
INSTALL WITH MINIMUM SPACING BETWEEN  
(1) CENTERS OF ADJACENT FIXTURES: 3 FEET;  
(2) TOPOF FIXTURES AND AN OVERHEAD  
BUILDING MEMBER: 12 INCHES; AND  
(3) FIXTURE CENTER TO SIDE WALL: 1-1/2 FEET  
P/N 56171

